

Interplay between couplings and common noise in phase synchronization: disagreement between global analysis and local stability characterization

David García-Álvarez,* Alireza Bahraminasab, Aneta Stefanovska, and Peter V.E. McClintock
Department of Physics, Lancaster University, Lancaster LA1 4YB, United Kingdom

(Dated: November 19, 2008)

We consider two coupled phase oscillators in the presence of proportional (“common”) and independent white noises. The global synchronization properties of the system are analytically studied via the Fokker-Planck equation. When the “effective coupling” is big compared to the common noises, the former favors and the latter hinder synchronization. On the contrary, when the coupling is small compared to the proportional noises, we find that the latter induce synchronization, optimally when their intensities are big and in the $n:m$ synchronization ratio. Furthermore, in such case a small value of the coupling is better for synchronization. Finally, we show that synchronization, which is a global property, must not be studied via local stability such as with Lyapunov exponents.

PACS numbers: 05.45.Xt, 05.10.Gg, 05.10.-a, 05.40.Ca.

Synchronization of interacting oscillatory processes is ubiquitous in nature [1]. For any general system of coupled oscillators, phase dynamics approach can be usefully applied provided that the intensities of all interactions on the oscillators, such as couplings between oscillators, effect of noise on the oscillators, etc, are small compared to the natural frequencies [2]. In such case, synchronization as an adjustment of rhythms of phase coupled oscillatory processes because of the interaction with each other is well understood. Another more intriguing kind of synchronization is the one induced by noise, which is observed in many natural and experimental systems, such as lasers [3], neurons [4], or ecological systems [5]. The first theoretical approach in the study of noise-induced synchronization in phase oscillators was by analyzing the Lyapunov exponent [6], but Lyapunov exponent only determines the local stability. A well established method of analyzing the global behavior of the system is via the Fokker-Planck equation [7], and synchronization in uncoupled phase oscillators with noise has already been studied using this approach [8, 9].

Still, an analysis that takes into account the two routes to synchronization – interactions between the oscillators (couplings), and common noise –, and studies the interplay between each other is lacking. In fact, in most real systems, coupling among the oscillators and the action of noise are simultaneously present, e.g. [10, 11]. In this letter we systematically investigate for the first time the effect of couplings, independent noises, and proportional noises (i.e., common noises but with different intensities) on phase synchronization. In particular, we show analytically and numerically how coupling and common noise compete in achieving synchronization: two different routes to synchronization are possible depending on whether the couplings or the common noise prevail. Moreover, the properties of the system when synchronized via couplings or by common noise clearly differ – for example, whether increasing the couplings or the

common noise results in stronger or weaker synchronization –, and therefore our results will be useful for taking apart systems in nature synchronized via interaction or via common noise.

The global behavior of the system will be studied via Fokker-Planck. After reducing and solving analytically the equation, we will analyze the role of non-common noise, proportional noise, and couplings in synchronization, and we will show the competence between couplings and common noise. Finally, we will present a case that shows that the Lyapunov exponent is not always a good indicator of synchronization.

Let us consider a system of two coupled oscillators in the presence of proportional and independent noises. The equations for the amplitude variables read:

$$\begin{aligned} \dot{x}_\alpha(t) = & F_\alpha(x_\alpha(t)) + \epsilon_\alpha V_\alpha(x_1(t), x_2(t)) \\ & + G_\alpha(x_\alpha(t)) \sqrt{D_\alpha} \xi(t) + H_\alpha(x_\alpha(t)) \sqrt{E_\alpha} \eta_\alpha(t), \end{aligned} \quad (1)$$

for $\alpha=1,2$. Here x_α is the amplitude component of the α -th oscillator, F_α is its individual dynamics, the V 's are the coupling functions, and the ϵ 's are the coupling intensities. $\xi(t)$ is the common noise, and $\eta_\alpha(t)$ are the non-common noises. G and H represent the coupling of the oscillators to the noises. $\xi(t)$ and $\eta_\alpha(t)$ are assumed to be independent Gaussian white noises, with zero mean value and unit intensity (as the actual intensities were taken aside into $\sqrt{D_\alpha}$ and $\sqrt{E_\alpha}$): $\langle \xi(t) \xi(s) \rangle = \delta(t-s)$, $\langle \eta_\alpha(t) \eta_\beta(s) \rangle = \delta_{\alpha\beta} \delta(t-s)$, $\langle \xi(t) \eta_\alpha(s) \rangle = 0$.

As long as the intensities of the couplings and of the noises remain small, we can make phase dynamics. Applying the phase reduction method to equation (1) we obtain the following equations for the phase variables [2, 9]:

$$\begin{aligned} \dot{\phi}_\alpha(t) = & \omega_\alpha + \epsilon_\alpha v_\alpha(\phi_1(t), \phi_2(t)) \\ & + \sqrt{D_\alpha} \xi(t) g_\alpha(\phi_\alpha(t)) + \sqrt{E_\alpha} \eta_\alpha(t) h_\alpha(\phi_\alpha(t)). \end{aligned} \quad (2)$$

Here ω_α is the natural frequency of the α -th oscillator. Note that, for the amplitude equations, the noises may

be either multiplicative, or just additive by making some of the functions G and/or H equal to 1; but the noises will become multiplicative for the phase dynamics.

We are interested in how much synchronization of a given order $n:m$ [1] equations (2) yield. We usually quantify the phase synchronization by evaluating how close to a fixed constant value the generalized phase difference ϕ_- stays over time. We thus make a bijective change of variables from ϕ_1 and ϕ_2 to ϕ_+ and ϕ_- :

$$\begin{aligned}\phi_- &= m\phi_1 - n\phi_2, & \phi_+ &= m\phi_1 + n\phi_2, \\ \phi_1 &= (\phi_+ + \phi_-)/(2m), & \phi_2 &= (\phi_+ - \phi_-)/(2n).\end{aligned}\quad (3)$$

The equation for ϕ_- is obtained by substituting (2) into the first equation of (3). The functions v_α , g_α and h_α in (2) must be 2π -periodic in all the phases, and therefore they can be written as a Fourier series. Now we will make a simplification, by replacing such functions by the lowest-order relevant contributions: these simplified equations will still yield all the important results. $v_1(\phi_1(t), \phi_2(t))$ will be replaced by $a_1 \sin \phi_-$, because as long as ϕ_- stays close to a given constant, other harmonics correspond to fast oscillations [1]. v_2 will be replaced by $a_2 \sin \phi_-$. The lowest resonant terms for $g_1(\phi_1)$ and $g_2(\phi_2)$ are respectively $b_1 \sin(m\phi_1)$ and $b_2 \sin(n\phi_2)$ as we will show later [12]. Finally, the h_α have no resonant terms as we will show later, so we just put the first harmonic $c_1 \sin(\phi_1)$ for h_1 and $c_2 \sin(\phi_2)$ for h_2 . With only the relevant terms, equations (2) read $\dot{\phi}_1 = \omega_1 + \varepsilon_1 \sin \phi_- + A_1 \xi(t) \sin(m\phi_1) + B_1 \eta_1(t) \sin \phi_1$, and $\dot{\phi}_2 = \omega_2 + \varepsilon_2 \sin \phi_- + A_2 \xi(t) \sin(n\phi_2) + B_2 \eta_2(t) \sin \phi_2$; where $\varepsilon_\alpha = a_\alpha \epsilon_\alpha$, $A_\alpha = b_\alpha \sqrt{D_\alpha}$, and $B_\alpha = c_\alpha \sqrt{E_\alpha}$. Using these equations and the first equation of (3), we get the equation $\dot{\phi}_- = \omega_- + \varepsilon_- \sin \phi_- + [m A_1 \sin(m\phi_1) - n A_2 \sin(n\phi_2)] \xi(t) + m B_1 \eta_1(t) \sin \phi_1 - n B_2 \eta_2(t) \sin \phi_2$, where $\omega_- = m\omega_1 - n\omega_2$ is the detuning, and the “effective coupling” ε_- is defined in the same way.

The former expression is an Itô stochastic differential equation, whose associated Fokker-Planck equation will be analyzed, considering ϕ_+ and ϕ_- as the independent variables. Things simplify much if we realise that $\phi_+(t)$ is a fast varying variable: in the absence of couplings and noises, $\phi_\alpha(t) = \omega_\alpha t$, so $\phi_+(t) = \omega_+ t$. In our case with couplings and noises, some corrections have to be made to this expression; but, as long as the coupling intensities ε_α , A_α , B_α are small compared to the frequency ω_α , such corrections will be small compared to the quickly growing term $\omega_+ t$, so we can take the approximation $\phi_+(t) \approx \omega_+ t$, and we may therefore integrate out ϕ_+ for one period in the Fokker-Planck equation; because of that, only the terms of the Fokker-Planck equation that do not contain any derivative with respect to ϕ_+ will be relevant. The equation for the probability density $W(\phi_+, \phi_-, t)$ is given by [7]:

$$\frac{\partial W}{\partial t} = -\frac{\partial}{\partial \phi_-} [(\omega_- + \varepsilon_- \sin \phi_-) W]$$

$$\begin{aligned}&+ \frac{1}{2} \frac{\partial^2}{\partial \phi_-^2} \{[m A_1 \sin(m\phi_1) - n A_2 \sin(n\phi_2)]^2 W \\ &+ [m B_1 \sin \phi_1]^2 W + [n B_2 \sin \phi_2]^2 W\} + \dots, \quad (4)\end{aligned}$$

where the suspension points stand for the terms that involve at least a derivative with respect to ϕ_+ . We will study the cases where the intensity of at least one noise is enough to make the system fall into the stationary solution, for which $\partial W / \partial t = 0$. In that state, we can take the approximation that the probability density W is almost independent of the fast variable ϕ_+ , because as we mentioned before $\phi_+ \approx \omega_+ t$, so $t \approx \phi_+ / \omega_+$ and therefore $0 = \partial W / \partial t \approx \omega_+ \partial W / \partial \phi_+$, from which we get $\partial W / \partial \phi_+ \approx 0$. As a result, we can work with the probability density of ϕ_- , $P(\phi_-)$, which results from the integration of W within a period of ϕ_+ . From the second line of (3), we see that the system is $4nm\pi$ -periodic in the variables ϕ_+ and ϕ_- . $P(\phi_-)$ is then defined as $P(\phi_-) = (1/4nm\pi) \int_0^{4nm\pi} W(\phi_+, \phi_-) d\phi_+ \approx W(\phi_-)$, where the time dependence was taken out of W because of the stationary condition, and the (approximate) independence of W of ϕ_+ was used in the last step.

From (4), replacing W by $P(\phi_-)$, writing ϕ_1 and ϕ_2 as a function of ϕ_+ and ϕ_- , and integrating out ϕ_+ between 0 and $4nm\pi$, we get:

$$\begin{aligned}&\frac{\partial}{\partial \phi_-} \left\{ -(\omega_- + \varepsilon_- \sin \phi_-) P + \frac{1}{4} \frac{\partial}{\partial \phi_-} [(m^2 (A_1^2 + B_1^2) \right. \\ &\left. + n^2 (A_2^2 + B_2^2) - 2nm A_1 A_2 \cos \phi_-) P] \right\} = \frac{\partial P}{\partial t} = 0, \quad (5)\end{aligned}$$

as the integrals of the terms that involve at least a derivative with respect to ϕ_+ are equal to zero because of periodicity. The stationary condition was used in the last equality. The last term “ $-2nm A_1 A_2 \cos \phi_-$ ” in the left hand side of (5) is the contribution to the integral of the term “ $-2m A_1 \sin(m\phi_1) n A_2 \sin(n\phi_2)$ ” coming from the first squared bracket in (4). That is the reason why we previously claimed that the lowest-order resonant terms of $g_1(\phi_1)$ and $g_2(\phi_2)$ in (2) – the couplings of the oscillators to the common noise – were respectively $b_1 \sin(m\phi_1)$ and $b_2 \sin(n\phi_2)$: the contribution of this crossed term of the squared difference to the integral is zero except for the m and n harmonics respectively (and integer multiples [12]). So other harmonics just add their “ A^2 ” terms to the “ B^2 ” terms arising from the non-common noises – see $(A_1^2 + B_1^2)$ and $(A_2^2 + B_2^2)$ in (5) –, and as a result the non-resonant harmonics of the couplings to the common noise play essentially the same role as the harmonics of the couplings to the non-common noises.

Equation (5) reads that the expression inside the top-level bracket in the left hand side is a constant, called the probability current S . If we call $f_1(\phi_-) = -4(\omega_- + \varepsilon_- \sin \phi_-)$ and $f_2(\phi_-) = m^2 (A_1^2 + B_1^2) + n^2 (A_2^2 + B_2^2) - 2nm A_1 A_2 \cos \phi_-$, equation (5) yields $P'(\phi_-) + [f_1(\phi_-) + f_2'(\phi_-)] P(\phi_-) / f_2(\phi_-) = S / f_2(\phi_-)$. This equation is easily solved by using the integrating

factor $M(\phi_-) = \exp[\int (f_1 + f_2')/f_2] = f_2 \exp[\int f_1/f_2]$, so the general solution of the differential equation is

$$P(\phi_-) = \frac{S \int_{\phi_0}^{\phi_-} \exp[V(x)] dx + N}{f_2(\phi_-) \exp[V(\phi_-)]}, \quad (6)$$

where $V(x) = \int_{x_0}^x f_1/f_2$. The lower limits ϕ_0 and x_0 for the former integrals are arbitrary, but once such values are chosen, they have to be kept the same. For convenience, we will set both to be equal to $-\pi$. The two constants N and S in (6) are obtained by imposing two conditions. The first one is that $P(\phi_-)$ has to be 2π -periodic (this comes from the fact that the equation to solve (5) is 2π -periodic in ϕ_-). The second condition is the normalization, i.e., the integral of $P(\phi_-)$ within one period has to be equal to 1.

$f_1(x)$ and $f_2(x)$ are 2π -periodic functions. A primitive $\tilde{V}(x)$ of f_1/f_2 can be obtained analytically, valid inside the interval $-\pi \leq x \leq \pi$. Also, the definite integral I_V of f_1/f_2 within one period can be calculated as $\tilde{V}(\pi) - \tilde{V}(-\pi)$. Such integral I_V turns out to be proportional to the mismatch ω_- . Putting all things together, the integral that defines $V(x)$ can always be obtained for any value of x , by writing as $x = (2\kappa - 1)\pi + \varphi$, with κ integer and $0 \leq \varphi \leq 2\pi$: $V(x) = \int_{-\pi}^x f_1/f_2 = \int_{-\pi}^{(2\kappa-1)\pi} f_1/f_2 + \int_{(2\kappa-1)\pi}^{(2\kappa-1)\pi+\varphi} f_1/f_2 = \kappa I_V + \int_{-\pi}^{-\pi+\varphi} f_1/f_2 = \kappa I_V + \tilde{V}(-\pi + \varphi) - \tilde{V}(-\pi)$. It is clear, as I_V is defined as the integral within one period (or from the former expression), that

$$V(x + 2\alpha\pi) = V(x) + \alpha I_V, \quad \alpha \in \mathbb{Z}. \quad (7)$$

A relationship between the two constants N and S in (6) will be obtained by imposing the periodicity condition $P(\phi_- + 2\pi) = P(\phi_-)$. To write the expression for $P(\phi_- + 2\pi)$, we first write the integral in (6) as $\int_{-\pi}^{\phi_-+2\pi} \exp[V(x)] dx = I_P + \int_{-\pi}^{\phi_-+2\pi} \exp[V(x)] dx = I_P + \exp(I_V) \int_{-\pi}^{\phi_-} \exp[V(x)] dx$, where $I_P = \int_{-\pi}^{\pi} \exp[V(x)] dx$, and (7) was used in the last step. The first factor in the denominator of (6) is periodic, $f_2(\phi_- + 2\pi) = f_2(\phi_-)$. In order to write the second factor $\exp[V(\phi_- + 2\pi)]$, (7) is used. Then, by imposing that $P(\phi_- + 2\pi)$ and $P(\phi_-)$ be equal, we obtain a relationship between S and N : $S = [\exp(I_V) - 1] N / I_P$. Note that, for $I_V = 0$, or equivalently, the mismatch ω_- equal to 0, the probability current S vanishes. Writing S as a function of N in (6):

$$P(\phi_-) = \frac{N}{f_2(\phi_-) e^{V(\phi_-)}} \left[1 + \frac{e^{I_V} - 1}{I_P} \int_{-\pi}^{\phi_-} e^{V(x)} dx \right], \quad (8)$$

where the constant N is the one that makes $P(\phi_-)$ to be normalized within one period, $\int_{-\pi}^{\pi} P(\phi_-) d\phi_- = 1$.

Some analytical results can be derived for the case of zero frequency mismatch. Such results hold, at least approximately, as long as the mistach remains small. For

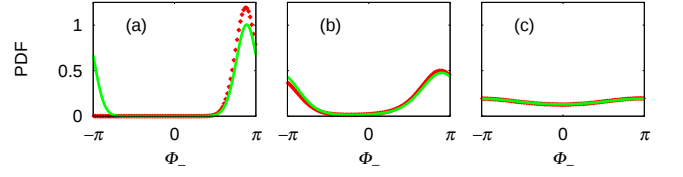


FIG. 1: Effect of non-common noise on synchronization. The line is the probability density function from the theoretical result (8) – the normalization constant N has been numerically obtained –; the points come from simulation. The plots are for $\nu_1 = 1.025$, $\nu_2 = 0.23$, $n = 9$, $m = 2$, $\varepsilon_1 = 0.1$, $\varepsilon_2 = -0.02$ – the coupling term is $\varepsilon_{1(2)} \sin \phi_-$ in the equation for $\dot{\phi}_{1(2)}$, so ε_1 and ε_2 will have opposed signs in general –, $A_1 = 0.1$ and $A_2 = 0.02$. B_1 and B_2 are 0.1 and 0.02 in (a), 0.3 and 0.06 in (b), 1 and 0.2 in (c). From the simulation of plot (a), ϕ_- stays within a small interval, the system never falls into the stationary solution due to the weakness of the noises. Therefore, for (a) the solution of the Fokker-Planck equation must be understood as an average over noise *and* over initial conditions. In the same way, the probability density obtained in (a) from simulation is only valid for the initial conditions for which the simulation was performed.

$\omega_- = 0$, the expression for the probability density function becomes much simpler: $P_0(\phi_-) = N_1 [m^2(A_1^2 + B_1^2) + n^2(A_2^2 + B_2^2) - 2nmA_1A_2 \cos \phi_-]^{(2\varepsilon_-/nmA_1A_2)-1}$, where N_1 is a constant independent of ϕ_- , to be adjusted so that the probability density be normalized to 1. This expression can be written in a more convenient way:

$$P_0(\phi_-) = N_1 \left[m^2 B_1^2 + n^2 B_2^2 + (mA_1 - nA_2)^2 + 4nmA_1A_2 \sin^2 \frac{\phi_-}{2} \right]^{(2\varepsilon_-/nmA_1A_2)-1}. \quad (9)$$

Stronger synchronization will take place when the term depending on ϕ_- (the last one inside the bracket) outstands out of the ϕ_- -independent terms (the other terms): the first three terms inside the bracket should be as close to zero as possible in order to obtain stronger synchronization. Two conclusions can be obtained from this. In the first place, the bigger the absolute value of B_1 and B_2 , the weaker the synchronization: independent noise is always harmful for synchronization. This property is plotted in Figure 1 (in the figures, the frequency mismatch is not exactly zero, but small). Secondly, the third term will be closer to zero the smaller in absolute value $mA_1 - nA_2$ be. In other words: the values of the couplings of the proportional noise to the first and second oscillators should ideally be in the same $n:m$ synchronization ratio in order to enhance the strenght of synchronization. This property can be seen on Figure 2: for (b), $mA_1 - nA_2$ is equal to 0, and the corresponding probability density is the most localized. Because of this, we will assume from now on that A_1 and A_2 both have the same sign.

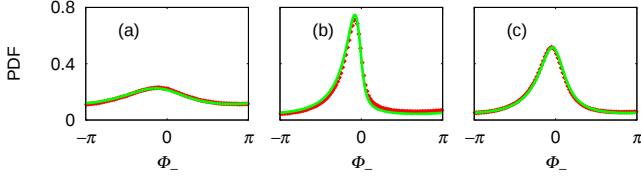


FIG. 2: Influence of the ratio between A_1 and A_2 in synchronization. $\nu_1 = 1.025$, $\nu_2 = 0.23$, $n = 9$, $m = 2$, $\varepsilon_1 = 0.001$, $\varepsilon_2 = -0.0002$, $B_1 = 0.1$, $B_2 = 0.02$ and $A_2 = 0.1$. A_1 is 0.1 in (a), 0.45 in (b), 0.8 in (c).

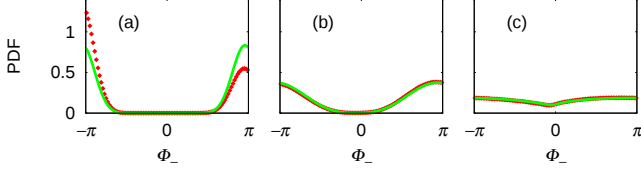


FIG. 3: Influence of the intensities of the common noise in coupling-induced synchronization. $\nu_1 = 1.025$, $\nu_2 = 0.23$, $n = 9$, $m = 2$, $\varepsilon_1 = 0.3$, $\varepsilon_2 = -0.05$, $B_1 = 0.1$, $B_2 = 0.02$. A_1 and A_2 are 0.225 and 0.05 in (a); 0.45 and 0.1 in (b); and 0.675 and 0.15 in (c) – note that $m A_1 - n A_2 = 0$ in the three plots –. Here we have for (a) the same as in Figure 1(a).

After stating the former constraint for A_1 and A_2 in order to improve synchronization, we now study how their intensities affect. Here we have two different scenarios: from the exponent in (9) we can study the competence between coupling and common-noise in synchronization. When the “effective coupling” ε_- is big compared to $A_1 A_2$, more specifically $\varepsilon_- > n m A_1 A_2 / 2$, the exponent is positive, so the probability density will have its maximum at $\phi_- = \pi$. If the product $A_1 A_2$ increases, the bracket in (9) will depend more strongly on ϕ_- – therefore the contribution of the bracket will be towards improving synchronization – but, on the other hand, the exponent will be smaller – therefore the contribution of the exponent will be towards flattening the probability density, and therefore towards hindering synchronization –. As (9) is more sensitive to the second effect (the exponent) than to the first effect, we conclude that, in this case of *coupling-induced synchronization*, bigger values of

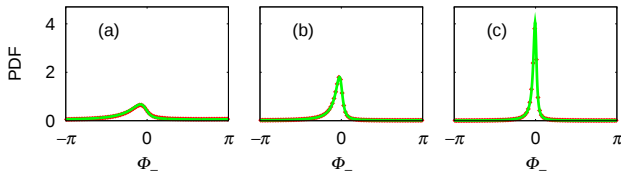


FIG. 4: Synchronization increases with the intensities of the common noise when induced by the latter instead of by couplings. $\nu_1 = 1.025$, $\nu_2 = 0.23$, $n = 9$, $m = 2$, $\varepsilon_1 = 0.01$, $\varepsilon_2 = -0.002$, $B_1 = 0.1$, $B_2 = 0.02$. A_1 and A_2 are 0.45 and 0.1 in (a); 0.9 and 0.2 in (b); 1.8 and 0.4 in (c) – note that $m A_1 - n A_2 = 0$ in the three plots –.

the noise (either common or non-common) hinder synchronization. This property can be seen on Figure 3.

When the intensities A_1 and A_2 of the common noise are big enough compared to the effective coupling, more specifically when $\varepsilon_- < n m A_1 A_2 / 2$, we are in a different regime: *common-noise-induced synchronization*. As the exponent in (9) is negative, the probability density will have a maximum at $\phi_- = 0$. Different from the previous case, a big value of $A_1 A_2$ is good now in the two ways: it makes the ϕ_- -dependent term inside the bracket outstand out of the other terms, and it makes the exponent be bigger in absolute value. This is shown on Figure 4 (and by comparing Figure 2(c) with 2(a)). Therefore, we can have very narrow peaks in the probability density and, as a result, strong synchronization, for small values of the non-common noises, and big values of the couplings of the common noise to the oscillators, whose “generalized difference” $m A_1 - n A_2$ is small in absolute value (nevertheless, A_1 or A_2 cannot be arbitrarily big because the approximation $\phi_+ \approx \omega_+ t$ would not hold any more; furthermore, from the physical standpoint, we must recall that the phase dynamics approach is valid when the values of the couplings are not big). In this regime of common-noise-induced synchronization, a bigger value of the effective coupling ε_- will result into an exponent smaller in absolute value: *small* values for the couplings between the oscillators are better for common-noise-induced synchronization.

Finally, we show that local stability, usually studied by means of the Lyapunov exponents, does not always characterize the synchronization properties of the system. In this letter we will just present a counterexample, and a more thorough analysis will be published elsewhere. Let us consider the most favorable case for common-noise-induced synchronization, where $B_1 = B_2 = m A_1 - n A_2 = \omega_- = 0$. As we have seen before, the probability density will have a maximum at $\phi_- = 0$. Equation (5) becomes $\partial_{\phi_-} (-\varepsilon_- \sin \phi_- P) + \partial_{\phi_-}^2 [n m A_1 A_2 \sin^2(\phi_-/2) P] = \partial_t P$. The corresponding Itô stochastic differential equation is: $d\phi_- = \varepsilon_- \sin \phi_- dt + \sqrt{2 n m A_1 A_2 \sin^2(\phi_-/2)} dw$, where w is a Wiener process [7]. By using Itô’s lemma [13], we get: $\langle d \log |\phi_-| \rangle = (\varepsilon_- \sin \phi_- / \phi_- - n m A_1 A_2 \sin^2(\phi_-/2) / \phi_-^2) dt$. By taking the limit $\phi_- \rightarrow 0$, we get the Lyapunov exponent at $\phi_- = 0$:

$$\lambda = \varepsilon_- - \frac{n m A_1 A_2}{4}. \quad (10)$$

Therefore, in the case $n m A_1 A_2 / 4 < \varepsilon_- < n m A_1 A_2 / 2$, the global analysis we have made via the probability density yields that the common noise prevails over the couplings in inducing synchronization, and that the system synchronizes with ϕ_- staying close to 0 most of the time. Nevertheless, the Lyapunov exponent is positive at $\phi_- = 0$. This shows that the local analysis made via the

Lyapunov exponent sometimes fails when characterizing synchronization, which is a global property.

In conclusion, we have studied phase synchronization between two oscillators in the general case: with couplings between each other, and the action of proportional and independent noises. Two different routes to synchronization are possible: via couplings and via common noise. When one induces synchronization, the other hinders it, thereby showing the competence of the two ways of synchronization. In particular, we have stated a surprising property: when synchronization is achieved via common noise, smaller values of the couplings (ideally no couplings) favor it. Finally, we have shown that synchronization, that is a global property, must not be studied by means of a local stability analysis such as via Lyapunov exponents. This work was supported by EU Project BRACCIA.

* Electronic address: d.garcia-alvarez@lancaster.ac.uk

- [1] A. Pikovsky, M. Rosenblum and J. Kurths, *Synchronization. A Universal Concept in Nonlinear Sciences*. Cambridge University Press, 2001.
- [2] Y. Kuramoto, *Chemical Oscillations, Waves, and Turbulence*. Springer-Verlag, 1984.
- [3] A. Uchida, R. McAllister, and R. Roy, Phys. Rev. Lett. **93**, 244102 (2004).
- [4] Z. F. Mainen and T. J. Sejnowski, Science **268**, 1503 (1995).
- [5] B. T. Grenfell, K. Wilson, B. F. Finkenstädt, T. N. Coulson, S. Murray, S. D. Albonk, J. M. Pemberton, T. H. Clutton-Brock, and M. J. Crawley, Nature (London) **394**, 674 (1998).
- [6] J. N. Teramae and D. Tanaka, Phys. Rev. Lett. **93**, 204103 (2004).
- [7] H. Risken, *The Fokker-Planck equation*. Springer-Verlag, 1989.
- [8] D. S. Goldobin and A. Pikovsky, Phys. Rev. E **71**, 045201(R) (2005).
- [9] H. Nakao, K. Arai, and Y. Kawamura, Phys. Rev. Lett. **98**, 184101 (2007).
- [10] A. Bahraminasab, D. Kenwright, A. Stefanovska, F. Ghasemi, and P.V.E. McClintock, IET Syst. Biol. **2**, 48 (2008).
- [11] B. Musizza, A. Stefanovska, P.V.E. McClintock, M. Paluš, J. Petrovčič, S. Ribarič and F. Bajrović, J. Physiol **580.1**, 315–326 (2007).
- [12] We assume that n and m have no common divisors, otherwise we divide both by the greatest common divisor. In the general case, all terms $\sin(k\phi_-)$ for integer k are resonant in v . Likewise, all the terms $\sin(km\phi_1)$ are relevant in g_1 and all the terms $\sin(kn\phi_2)$ are relevant in g_2 , although resonance only takes place between terms with the same k .
- [13] K. Itô, Memoirs, American Mathematical Society **4**, 1–51 (1951).